

STREETLED 37W

FEATURES

- LED Module of 18 LEDs
- 37W @700mA,
- Total Power Consumption 42W
- Colour Temperature: 4000K
- Colour Rendering Index: 70
- Self cleaning visor
- D2 type photoelectric cell
- Design life of 20 Years

KEY APPLICATIONS

- Amenity
- Carpark
- Pedestrian
- Roadway
- LED Technology



LUMINAIRE CONSTRUCTION

Pressure die-cast aluminium body
Self Cleaning Acrylic visor with silicone foam

- gasket
- Integrated heat sink
- Hinged access cover with quick access clip
- Stainless steel fasteners
- Side entry mounting, fits 27 to 34mm O.D. pipe
- Plug & Play Electronic control gear and LED module
- Natural finish as standard
- IP66 rated LED light engines.
- IK07
- Colour Temperature 4000K standard.
- CRI 70
-
-
-
-
-
-


OPTIONS AVAILABLE

- Photoelectric Control NEMA.
- 18W and 25W, total power consumption 22W and 29W respectively
- 5 pin and 7 pin Photoelectric control receptacle base only.
- Aeroscreen Visor, Glare shield Visor and Pathway visor
- Class II
- Dimmable
- Polyester Powdercoat finish in various Dulux
- and RAL colours
-

Order Code	Description	Dimensions	Weight
JLA9901L42	StreetLED 37Y	75 x 290 x 156mm	.9
JLA00000	STLED VISOR & FRAME SCO UNPTD		
JLA00002	STLED VISOR & FRAME CO UNPTD		
JLA00003	STLED VISOR & FRAME SCO GS UNPTD		
JLA00007	STLED VISOR & FRAME SCO PATHWAY		
JLA000013	STLED SPIGOT CLAMP ASSEMBLY UNPTD		
JLA9911L42	StreetLED 37W Aeroscreen	475 x 290 x 100mm	.9

Note:

Contact your Sylvania representative for photometric information or choose to submit an enquiry for more information.

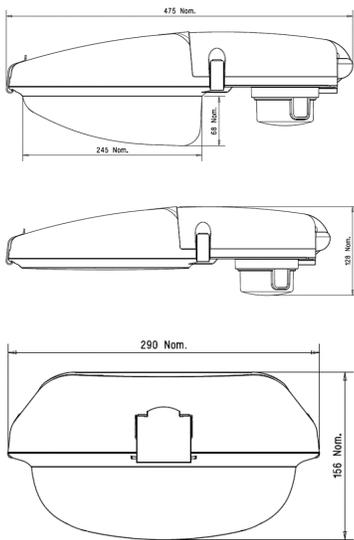

For more information,
scan the QR code:

