

Lighting Systems

ALDRIDGE




berlin



www.aldridgetraffic.com.au

berlin

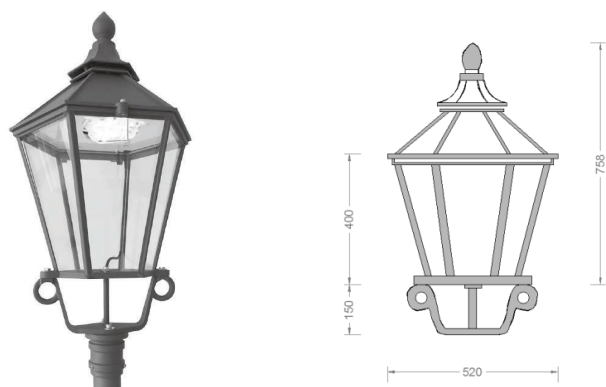

- Body: High Pressure Die-cast aluminum (marine grade)
- Optics: Type 3 - 5 Distribution
- LED #: Cree: 24
- Wattage: 14 - 30 watts
- Finishing: Powder Coat
- Mounting: 4-9m
- Fixing: Post top mount
- IP rating: IP65
- IK rating: IK10
- Voltage: 240V 50/60Hz
- Power Factor: > 0.9

- Photocell: 7-pin Nema receptacle (7PN)
- Fuse Terminal Block: (FTB)
- Surge Protection Device: (SPD - 10KV_a, 20KV_a)
- Class II (DB - Double Insulated)
- Color: Grey (Standard)
- CCT: 3000K, 4000K (Standard), 5000K
- Visor: Glareshield/spill light kit (GV)

- Designed to meet stringent Australian Standards
- Self cleaning housing and PMMA optical diffuser
- High Performance LED & Optics to meet AS/NZ1158
- Integrated thermal management
- Segregated termination chamber
- Hinged “quick access latch”
- Complies with AS/NZ 1158.6 & AS/NZ 1158.1
- 10 Year Warranty

Product Code	BER510	BER514	BER530
Wattage (watts)	14	23	28
Input Voltage	240	240	240
CCT (K)	4000	4000	4000
CRI	Ra>80	Ra>80	Ra>80
IP Protection	IP65	IP65	IP65
IK Protection	IK10	IK10	IK10
Weight (Kg) - max.	15	15	15