

Lighting Systems

ALDRIDGE



fLud series



www.aldridgetraffic.com.au

ALDRIDGE

Aldridge lighting systems delivers an aesthetically low profile area lighting system suitable for Roadway, Tunnel and Landscape applications.

With over 40 years experience in outdoor infrastructure, Aldridge delivers a versatile range in three sizes, small, medium and large to suit today's ever changing landscape and to withstand the test of time with state of the art engineering in;

- Hardware
- Optics
- Environmental
- Performance
- RGB



ALDRIDGE

Code

Page

FU.S



4

FU.M



5


FU.L



6

fLud series

fLud-s




- Designed to meet stringent Australian Standards
- Suitable for Roadway, Tunnel and Landscape applications
- Self cleaning housing and optical diffuser
- High Performance LED & Optics to meet AS/NZ1158
- Integrated thermal management
- Segregated termination point
- Hinged “quick access latch”
- Complies with AS/NZ 1158.6 & AS/NZ 1158.1
- 10 Year Warranty

Technical Data

- Body: High Pressure Die-cast aluminum (marine grade)
- Optics: Asymmetric – Symmetrical Distributions
- LED #: Cree: 36 - 36 – 48 – 48(RGB)
- Wattage: 80 – 100 - 120 – 120(RGB) watts
- Finishing: Powder Coat (Grey Standard)
- Fixing: Trunnion mount.
- IP rating: IP66
- IK rating: IK09
- Voltage: 240V 50/60Hz
- Power Factor: > 0.9

Photometry Data

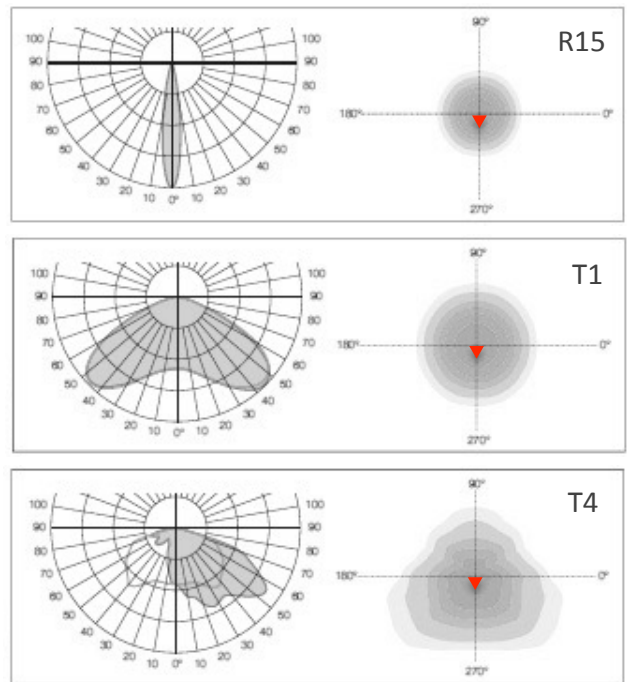

Options


- Photocell: 7-pin Nema receptacle (7PN)
- Fuse Terminal Block: (FTB)
- Surge Protection Device: (SPD - 10KVa, 20KVa)
- Class II (DB - Double Insulated)
- Color: Black (BL), White (WH), Grey (GR- Standard)
- CCT: 3000K, 4000K (Standard), 5000K
- Visor: Glareshield/spill light kit (GV)
- Controller: RS485 lamp based driver suitable for Tunnel Lighting
- RGB: DMX Controller



Product Code	FU.S.80W	FU.S.100W	FU.S.120W	FU.S.120W.RGB
LED Qty	36	36	48	48
Photometric Distribution	R15 – T1 – T4	R15 – T1 – T4	R15 – T1 – T4	R15 – T1
System Wattage (watts)	80	100	120	120
Input Voltage (V)	240	240	240	240
Current Drive (mA)	766	957	862	862
CCT (K)	4000	4000	4000	4000
CRI	Ra>70	Ra>70	Ra>70	Ra>70
IP Protection	IP66	IP66	IP66	IP66
IK Protection	IK09	IK09	IK09	IK09
Weight (Kg) - max.	9.2	9.2	9.2	9.2

fLud-m

ALDRIDGE






- Designed to meet stringent Australian Standards
- Suitable for Roadway, Tunnel and Landscape applications
- Self cleaning housing and optical diffuser
- High Performance LED & Optics to meet AS/NZ1158
- Integrated thermal management
- Segregated termination point
- Hinged "quick access latch"
- Complies with AS/NZ 1158.6 & AS/NZ 1158.1
- 10 Year Warranty

Technical Data

- Body: High Pressure Die-cast aluminum (marine grade)
- Optics: Asymmetric – Symmetrical Distributions
- LED #: Cree: 64 - 80 - 96 - 96
- Wattage: 150 – 200 – 240 – 240(RGB) watts
- Finishing: Powder Coat (Grey Standard)
- Fixing: Trunnion mount.
- IP rating: IP66
- IK rating: IK09
- Voltage: 240V 50/60Hz
- Power Factor: > 0.9

Photometry Data

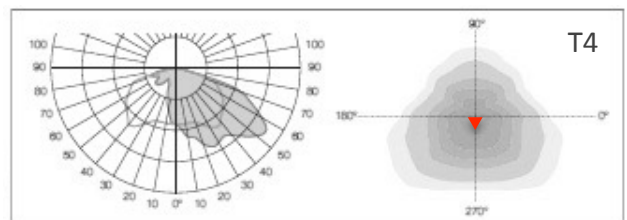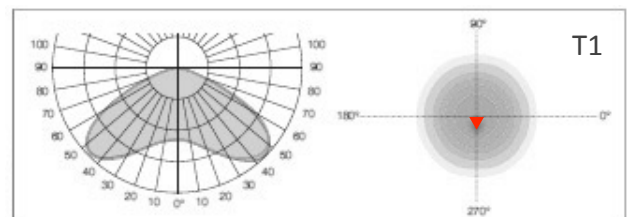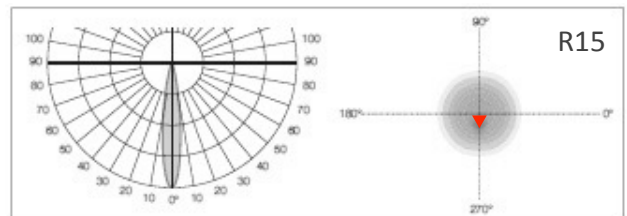

Options

- Photocell: 7-pin Nema receptacle (7PN)
- Fuse Terminal Block: (FTB)
- Surge Protection Device: (SPD - 10KVa, 20KVa)
- Class II (DB - Double Insulated)
- Color: Black (BL), White (WH), Grey (GR- Standard)
- CCT: 3000K, 4000K (Standard), 5000K
- Visor: Glareshield/spill light kit (GV)
- Controller: RS485 lamp based driver suitable for Tunnel Lighting
- RGB: DMX Controller



Product Code	FU.M.150W	FU.M.200W	FU.M.240W	FU.M.240W
LED Qty	64	80	96	96
Photometric Distribution	R15 – T1 – T4	R15 – T1 – T4	R15 – T1 – T4	R15 – T1
System Wattage (watts)	150	200	240	240
Input Voltage (V)	240	240	240	240
Current Drive (mA)	808	862	862	862
CCT (K)	4000	4000	4000	4000
CRI	Ra>70	Ra>70	Ra>70	Ra>70
IP Protection	IP66	IP66	IP66	IP66
IK Protection	IK09	IK09	IK09	IK09
Weight (Kg) - max.	13.3	13.4	13.4	13.4

fLud-I

ALDRIDGE






- Designed to meet stringent Australian Standards
- Suitable for Roadway, Tunnel and Landscape applications
- Self cleaning housing and optical diffuser
- High Performance LED & Optics to meet AS/NZ1158
- Integrated thermal management
- Segregated termination point
- Hinged "quick access latch"
- Complies with AS/NZ 1158.6 & AS/NZ 1158.1
- 10 Year Warranty

Technical Data

- Body: High Pressure Die-cast aluminum (marine grade)
- Optics: Asymmetric – Symmetrical Distributions
- LED #: Cree: 120 – 140 – 140(RGB)
- Wattage: 300 – 360 – 300(RGB) watts
- Finishing: Powder Coat (Grey Standard)
- Fixing: Trunnion mount.
- IP rating: IP66
- IK rating: IK09
- Voltage: 240V 50/60Hz
- Power Factor: > 0.9

Photometry Data

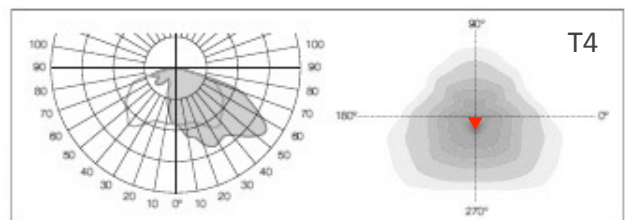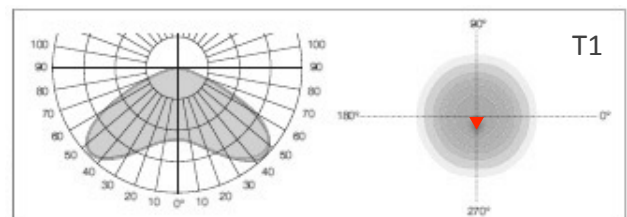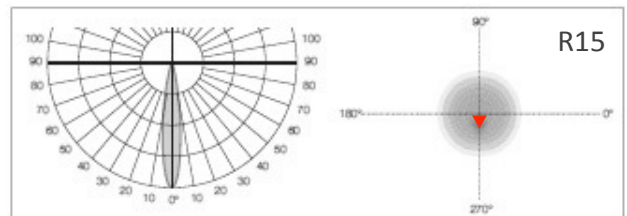

Options

- Photocell: 7-pin Nema receptacle (7PN)
- Fuse Terminal Block: (FTB)
- Surge Protection Device: (SPD - 10KV_a, 20KV_a)
- Class II (DB - Double Insulated)
- Color: Black (BL), White (WH), Grey (GR- Standard)
- CCT: 3000K, 4000K (Standard), 5000K
- Visor: Glareshield/spill light kit (GV)
- Controller: RS485 lamp based driver suitable for Tunnel Lighting
- RGB: DMX Controller




Product Code	FU.L.300W	FU.L.360W	FU.L.300W.RGB
LED Qty	120	140	140
Photometric Distribution	R15 – T1 – T4	R15 – T1 – T4	R15 – T1
System Wattage (watts)	300	360	300
Input Voltage (V)	240	240	240
Current Drive (mA)	862	887	739
CCT (K)	4000	4000	4000
CRI	Ra>70	Ra>70	Ra>70
IP Protection	IP66	IP66	IP66
IK Protection	IK09	IK09	IK09
Weight (Kg) - max.	21.2	21.2	21.2

ALDRIDGE


Code

Dimension


FU.S

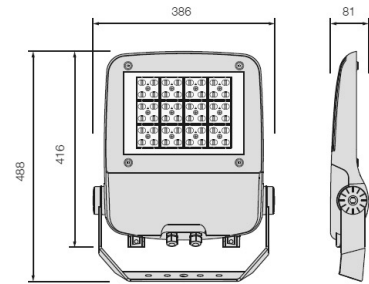

FU.M

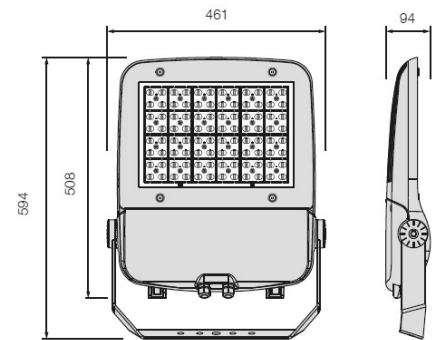

FU.L

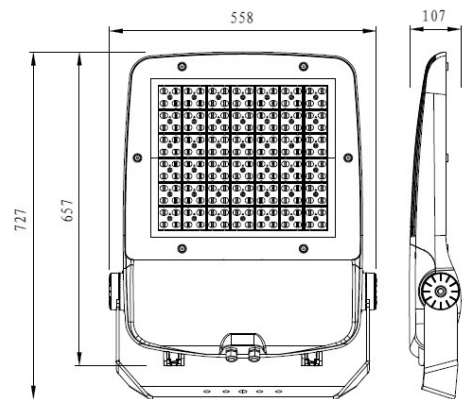

fLud

Aldridge Traffic Systems Pty Ltd

12 - 14 Leeds Street
Rhodes NSW 2138

Phone + 61 2 9736 3677
Facsimile + 61 2 9736 3391
Email info@aldridgetraffic.com.au
Web aldridgetraffic.com.au

VIC

P +61 3 9430 0222
F +61 3 9430 0244

ACT

P +61 2 6299 7922
F +61 2 6299 7977

QLD

P +61 7 3266 1900
F +61 7 3266 2244

SA

P +61 8 8362 2385

WA

P +61 8 9248 1002
F +61 8 9209 2288

TAS

P +61 3 6273 1177
F +61 3 6273 1759

NT

P +61 8 8947 0733
F +61 8 8947 0713

United Kingdom

P +44 (0) 1159 223 797
F +44 (0) 7711 511 183