



V-led_{MKII}

ALDRIDGE



- Smart City Ready – TST compatibility Zigbee, LoRa, NBIOT
- High Performance roadway luminaire designed to meet stringent Australian/New Zealand road lighting Standard, AS/NZS 60698.2.3 & AS/NZS TS 1158.6
- High performance Optics designed to comply and meet Australian Standards AS1158-1.1 Cat V
- Direct replacement of conventional V- category High Pressure Sodium and Metal Halide luminaires
- Semi-cutoff & Aero screen (std) diffuser
- Integrated thermal management
- Segregated termination chamber c/w quick access
- 20 year Design Life
- 10 Year Warranty


Technical Data

- Body: High Pressure Die-cast aluminum (marine grade)
- Optics: Type 2/3/5 (Std)
- LED: CREE
- Wattage: 75 - 265 watts
- Finishing: Powder Coat (Grey Standard)
- Mounting: 9 – 15 m
- Fixing: Side spigot mount (42-40mm OD)
- IP rating: IP66
- IK rating: IK06
- Voltage: 220V-240V 50/60Hz
- Power Factor: > 0.9

Options

- Photocell: 7-pin Nema receptacle (N7P)
- Fuse Terminal Block: (FTB)
- Surge Protection Device: (SPD - 10KV , 20KV)
- Class II (DB - Double Insulated)
- Color: Black (BL), White (WH), Grey (GR- Standard)
- CCT: 3000K, 4000K (Standard), 5000K
- Visor: Glare shield/spill light kit (GV)
- Remote Gear: (RG)
- 5 Deg Tilt Adjustment Adapter (STA)

Photometry Data

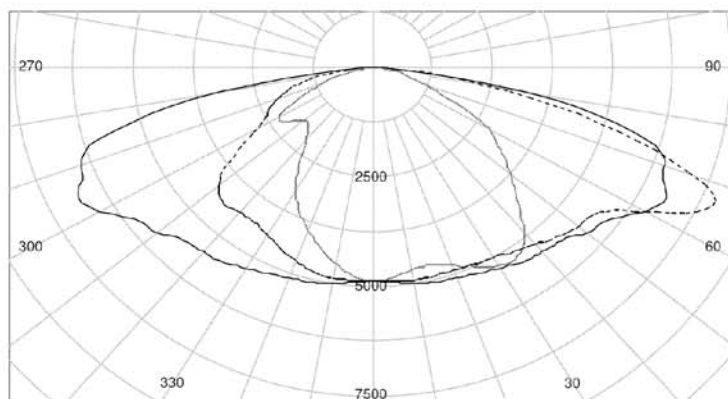

Product Code	V155WT5FTN7PBP
Power (watts)	155 W
Input Voltage	220-240V 50/60Hz
CCT (K)	4000
CRI	> 70
IP Protection	IP65
IK Protection	IK06
Weight (Kg) - max. Remote Gear: Less 1.8kg	13 KG