
**Test Report - Products** *Prüfbericht - Produkte* 



Accreditation for compliance with ISO/IEC 17025 Technical Competence - Testing



Test report no.: Prüfbericht Nr.:	AU22A3IL 001	<b>Order No.:</b> Auftrags-Nr.:	252104566	Page 1 of 8 Seite 1 von 8
Client Reference No.: Kunden-Referenz-Nr.:	2071295	<b>Order date:</b> Auftragsdatum:	27-May-2022	
<b>Client:</b> Auftraggeber:	Aldridge Traffic Systems Pty 12-14 Leeds Street, Rhodes	v. Ltd. s, NSW 2138, Austr	ralia	
<b>Test item:</b> Prüfgegenstand:	LED Street Light			
Identification/ Type No.: Bezeichnung / Typ-Nr.	V147WT5FTN7PBP-TMR			
Order content: Auftrags-Inhalt:	Lamp Circuit Power (LCP) N	leasurement		
Test specification: Prüfgrundlage:	Refer to page 2			
Date of sample receipt: Wareneingangsdatum:	07-July-2022			
Test sample No: Prüfmuster-Nr.:	A003297454-001 to A003297454-010			
<b>Testing period:</b> <i>Prüfzeitraum:</i>	11-July-2022 - 13-July-2022			1229 a Hard
Place of testing: Ort der Prüfung:	TUV Rheinland Australia Pty Ltd		47 C	
Testing laboratory: Prüflaboratorium:	TUV Rheinland Australia Pty Ltd			
<b>Test result*:</b> Prüfergebnis*:	Samples were submitted for measurement only, no compliance limits			
tested by: geprüft von:		authorized by: genehmigt von:	I	
Date: 22-Jul-2022	Qasim Rehan/	– <b>Issue Date:</b> 22- Ausstellungsdat		Ngo/
Position / Stellung: E	Expert	Position / Stellu	<i>ing:</i> Expert	
	sumption measurement at rate ion (Ambient (20±5)°C, Relativ			Market Operator)
Condition of the test iter Zustand des Prüfgegensta	-	Test item comple	ete and undamaged	
* Legende: P(ass) = entspricht o	.g. $Pr üfgrundlage(n)$ $F(ail) = entsprich$	t. test specification(s) t nicht o.g. Prüfgrundlage(r.g.)		ÿ
permitted to be	ates to the a.m. test sample. We e duplicated in extracts. This test sich nur auf das o.g. Prüfmuster u	st report does not e	ntitle to carry any tes	t mark.

Mail: info@au.tuv.com · Web: https://www.tuv.com/australia/en/



Page 2 of 8 Seite 2 von 8

### Remarks

1	The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.					
2	As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.					
3	Test clauses with remark of * are subcontracted to qualified subcontractors and descripted under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.					
4	The decision rule for statements of conformity in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report.					
5	This test report is based on assessment and tests applied to the specific test item(s) as submitted by the client. TÜV Rheinland Australia disclaims any and all responsibility or obligation for any other item.					
6	LCP test was conducted on 10 fittings as per requested schemes.					
N// <b>Op</b> Th	tions/access	ories/ancillary equi	ny optional accessory instal		rt does not cover parameters	
		quipment used:		ingrit anect safety in	the meaning of this standard	
	Equipment	Equipment No.	Range used	Uncertainty	Calibration Due Date	
	inital Damas		Voltage: 200V - 300V	±0.2V		
	igital Power			.0.0024	04 4 0000	
D	lgital Power leter		Current: 1 A	±0.002A	01 Apr 2022	
D M	-	MEL-1464	Current: 1 A Power: 115mW – 4.6kW	±0.002A ±2.5%	21-Apr-2023	

circuit power consumption measurement were placed in a draught free room and at the laboratory condition (Ambient (20±5)°C, Relative Humidity (45–75)%) for 24 hours before and during the measurement.

The test samples were connected to the power source and supplied with voltage and frequency as listed in "TABLE: Power Measurement". The test samples were operated until the conditions of overall temperature equilibrium were established or at least 4 hours in stabilized operation with the supplied sources. Then the total power consumption measurements have been taken by power meter.



Page 3 of 8 Seite 3 von 8

# **Product description**

1	Product details:	LED Street Light		
-		Trademark / Manufacturer: Aldridge Traffic Systems Pty. Ltd.		
		Model: V147WT5FTN7PBP-TMR		
		Rating: 230 Vac 50 Hz 0.64A 147W PF>0.9; IK08 IP65		
2	Dimensions / Weight:	Approx. Length [mm] x Width [mm] x Depth [mm]: 800 x 350 x 170		
		Approx. Weight [kg]: 11.30		
3	Operating elements:	Built-in LED driver		
		Trademark / Manufacturer: INVENTRONICS		
		Model: EUM-200S560BG		
		Input rating: 100-240Vac; 50/60 Hz; 2.2A 240W; PF≥ 0.92; IP67/IP66		
		ta: -40°C~+60°C; tc: 90°C		
		Output rating: 18-57Vdc; 5.60A; 200W		
4	Equipment / Accessories:	N/A		
5	Used materials:	N/A		
6	Other:	Test sample(s), as well sample information, description, product details and intended usage was provided by customer.		
7	Test sample obtaining:	<ul> <li>☑ Sending by customer</li> <li>□ Sampling by TÜV Rheinland Group</li> <li>□ others:</li> </ul>		



Page 4 of 8 Seite 4 von 8


#### **TABLE: Power Measurement**

	Test Item	Supplied Voltage (V)	Frequency (Hz)	Measured Input Power (W)	Measured Input Current (A)	Power Factor
1	V147WT5FTN7PBP-TMR	250.12	50	143.26	0.5912	0.9687
2	V147WT5FTN7PBP-TMR	250.07	50	142.30	0.5866	0.9701
3	V147WT5FTN7PBP-TMR	250.04	50	142.15	0.5861	0.9700
4	V147WT5FTN7PBP-TMR	250.12	50	142.65	0.5883	0.9695
5	V147WT5FTN7PBP-TMR	250.09	50	143.36	0.5913	0.9695
6	V147WT5FTN7PBP-TMR	250.00	50	143.39	0.5913	0.9700
7	V147WT5FTN7PBP-TMR	250.03	50	143.98	0.5939	0.9696
8	V147WT5FTN7PBP-TMR	250.07	50	143.47	0.5913	0.9702
9	V147WT5FTN7PBP-TMR	250.04	50	143.80	0.5930	0.9698
10	V147WT5FTN7PBP-TMR	250.08	50	143.43	0.5911	0.9703
Average		250.07	50	143.18	0.5904	0.9698



Page 5 of 8 Seite 5 von 8

Marking

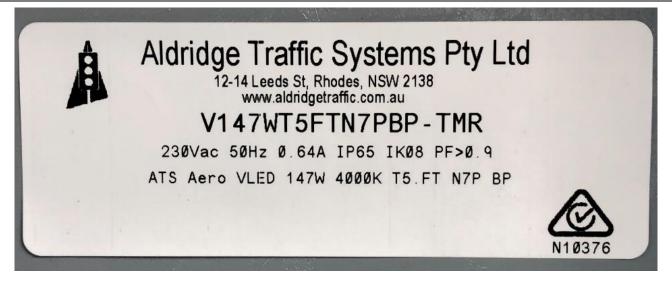

**Rating label** 

**Test Report - Products** *Prüfbericht - Produkte* 



Page 6 of 8 Seite 6 von 8

# Test report no.: AU22A3IL 001

### Photo documentation



#### **Product overview**



**Product overview** 

**Test Report - Products** *Prüfbericht - Produkte* 



# Test report no.: AU22A3IL 001

Page 7 of 8 Seite 7 von 8

## Photo documentation



## LED Module Compartment



Terminal block for supply mains connection



Page 8 of 8 Seite 8 von 8

#### **Photo documentation**



#### **Control gear compartment**



LED driver

End of test report